

## NICE PACKAGING

GOOD LOOKING AND WELL PROTECTION PACKAGE

## MANUFACTURER

10+ YEARS RICH EXPERIENCE  
ON CUSTOMIZED SOLUTION

## HIGH QUALITY

RELIABLE MACHINE QUALITY FOR LONG USING LIFE


# DOOR PACKING MACHINE

**HIGH SPEED, SAFETY, EFFICIENCY**

Fhope Providing Door Packing Machine For Full Sides Door Sealed  
Protection Packaging Per Different Size And Weight More Than 10+  
Years Experience.



**AUTOMATIC  
MATERIAL FEEDING**



**AUTOMATIC  
CALCULATING**



**INVERTER  
ADJUSTMENT**



**DIFFERENT  
PACKING  
MATERIAL**



**AUTOMATIC  
SENSING**



**EASY  
LOADING**



**CE STANDARD  
SAFETY LEVEL**

**PLC**

**PLC PROGRAM**

# MACHINE DETAIL

Updated Designing In Every Part Of The  
Door Packing Machine Guarantee The Reliable Function In  
Long Life Running



MATERIAL AUTOMATIC FEEDING  
BY SENSER CONTROLLER





LONG SEALER FOR NICE CUTTING  
AND SEALING



DOUBLE PRESSER FOR BOTH SIDES  
SEALED PACKAGE





IN-FEEDING CONVEYOR ADJUSTABLE  
FOR DIFFERENT DOOR SIZE



PACKING MATERIAL TENSION ADJUSTABLE  
FOR NICE APPEARANCE AND PROTECTION .



# EASY OPERATION

Fool Style Operation By Non-Skilled Operator Per  
Plc & Hmi With Intelligent Program.

PROGRAM  
DESK

EMERGEN  
CY STOP

SIMPLE  
BOTT  
ON PANEL

EASY  
CONTROL

# LABOR COST SAVING

High Packing Speed, Easy Door Handling

Speed:10-30sec/door


Operator:Only one





# REMOTE SONSOLE

✓ Providing Industry Gateway and Plc Module Allows To Quick Supportive In After Service And Maintainment.

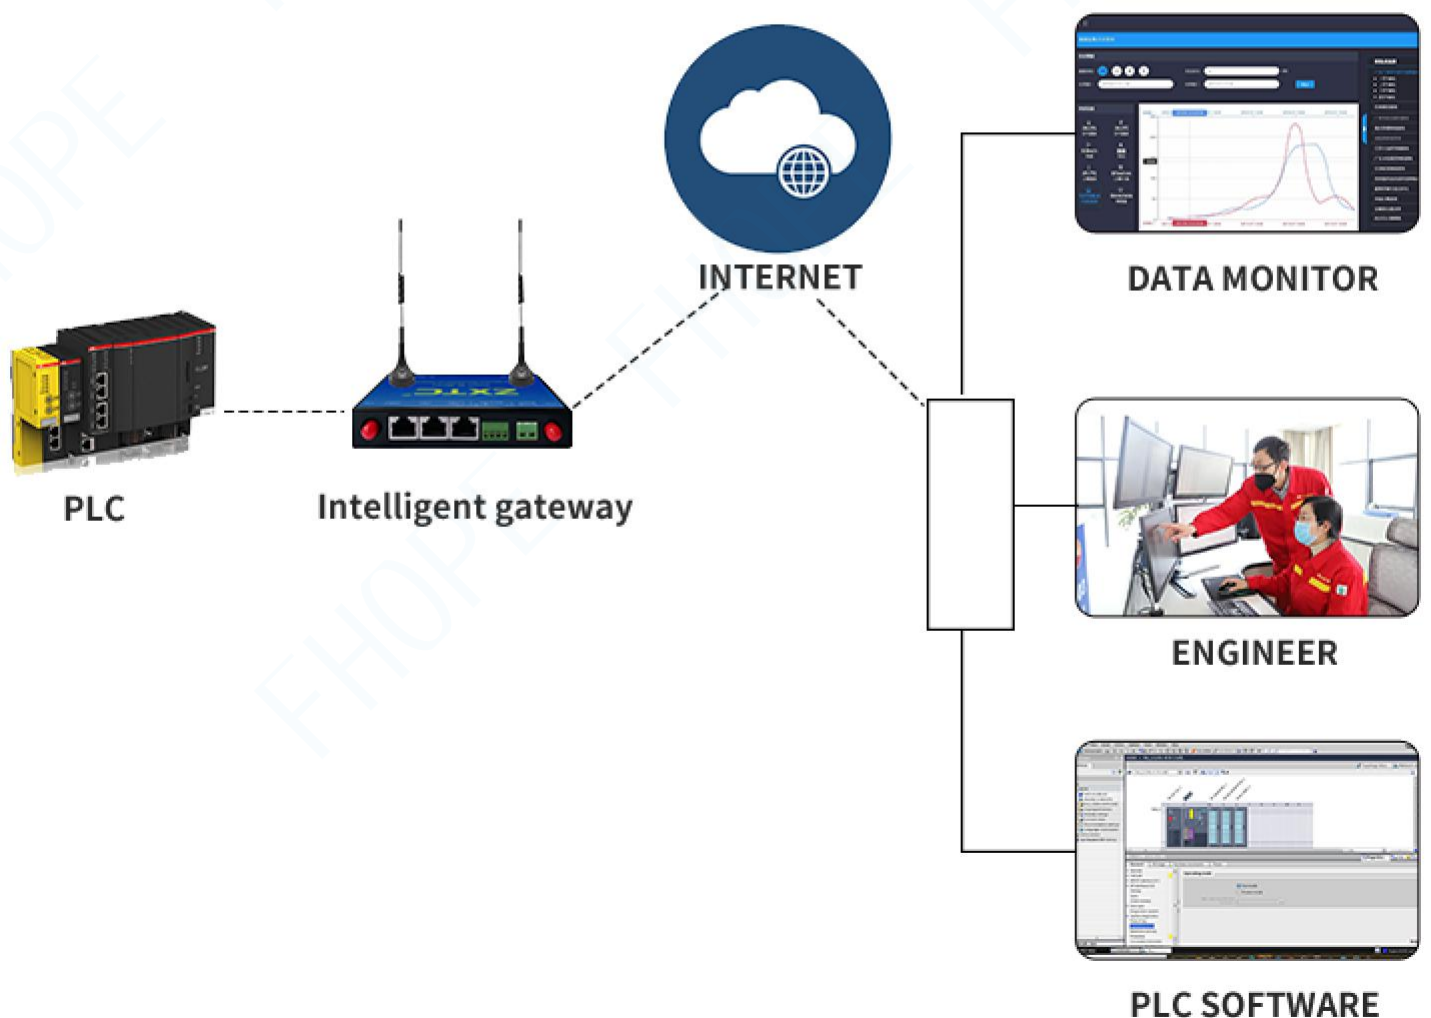



# SAFETY

Safety For Operator Machine Designing  
Base On CE Standard, Providing Interlock, Lens  
Barrel. Isolated Moving Parts From Operator

AUTO  
MATIC  
SENDER

AUTO  
MATIC  
ALARM

INTE  
RLO  
CKING

# CUSTOMERS

Over 150+ Door Packing Machine Working For The Cost Saving  
Packing Around The World More Than 50+ Country





PAREMETER

	FHOPE-1000E	FHOPE-1000
1. SEALING MACHINE		
Control	PLC	PLC
Sealer	1 sets	1 sets
Structure Material	Carbon steel	Carbon steel
Shrinking Object	door/ panel	door/ panel
Max width	700-1200mm	700-1200mm
Length	Unlimited	Unlimited
Thickness	10-100mm	10-100mm
Weight	10-110kg	10-110kg
Height of Working Table	app. 800mm	app. 800mm
Conveyor speed	app. 0-12m/min	app. 0-12m/min
Packing Material	PE film	PE film
In-feed conveyor belt length	1500mm	1500mm
Out-feed conveyor length	2000mm	2000mm
power consumption	app.5.5KW	app.5.5KW
Power Supply	380V, 50HZ, 3phase	380V, 50HZ, 3phase
Compressed Air Supply	6~8kgf/cm2	6~8kgf/cm2
Machine weight	app. 450kg	app. 500kg
Shrinking part		
Structure Material	Carbon Steel	Carbon Steel
Shrinking Tunnel	L2500 ×W1300mm × H200mm	L2500 ×W1300mm × H200mm
Power Consumption	App.30Kw	App.30Kw
Drive Part	Frequency control Motor	Frequency control Motor
Conveyor speed	app. 0-8m/min	app. 0-8m/min
Temperature	100℃-220℃	100℃-220℃
Packing Material	PE Film, 40-100 micron thick (30-150micron are available.)	PE Film, 40-100 micron thick (30-150micron are available.)
Power Supply	380V, 50HZ, 3phase	380V, 50HZ, 3phase
Machine weight	app. 550kg	app. 600kg
FUNCTION & CONFIGURATION		
PLC	Xinjie	Omron/DELTA
INVERTER	Xinjie	Omron/DELTA
In-feeding conveyor	AC MOTOR	AC MOTOR with inverter
Transfer conveyor	Option	Included
Film Feeding	Passive	Motor drive
Standard	Chines CCC	EURO CE
Remote control	NON	Option